

Product family datasheet PARATHOM LED PIN G9

Special LED lamps



 Atmospheric accent lighting throughout the home Shops, hotels and restaurants Foyers, offices Outdoor applications only in suitable luminaires

- Long lifetime of up to 15,000 h Very low energy consumption Ideal for decorative and free-burning applications
- Product features LED alternative to conventional high voltage lamps Mercury-free lampsProduct benefits Long lifetime of up to 15,000 h Very low energy consumption Ideal for decorative and free-burning applicationsAreas of application Atmospheric accent lighting throughout the home Shops, hotels and restaurants Foyers, offices Outdoor applications only in suitable luminairesReferences / LinksFor further products and actual information concerning LED lamps see www.ledvance.com/ledlampsFor Guarantee see www.ledvance.com/guarantee



March 27, 2020, 23:59:26 PARATHOM LED PIN G9

Technical data


Electrical data		Photometrical data			Light technical data	Dimensions & weight
Nominal wattage	Nominal voltage	Nominal luminous flux	Rated color temperature	Light color (designation)	Starting time	Overall length
4.80 W	220240 V	600 lm	4000 K	Cool White	< 0.5 s	59.0 mm
4.80 W	220240 V	600 lm	2700 K	Warm White	< 0.5 s	59.0 mm
2.60 W	220240 V	320 lm	2700 K	Warm White	< 0.5 s	52.0 mm
2.60 W	220240 V	320 lm	4000 K	Cool White	< 0.5 s	52.0 mm
3.80 W	220240 V	470 lm	4000 K	Cool White	< 0.5 s	58.0 mm
	Nominal wattage 4.80 W 4.80 W 2.60 W 2.60 W	Nominal wattage Nominal voltage 4.80 W 220240 V 4.80 W 220240 V 2.60 W 220240 V 2.60 W 220240 V	Nominal wattage Nominal voltage Nominal luminous flux 4.80 W 220240 V 600 lm 4.80 W 220240 V 600 lm 2.60 W 220240 V 320 lm 2.60 W 220240 V 320 lm	Nominal wattage Nominal voltage Nominal luminous flux Rated color temperature 4.80 W 220240 V 600 lm 4000 K 4.80 W 220240 V 600 lm 2700 K 2.60 W 220240 V 320 lm 2700 K 2.60 W 220240 V 320 lm 4000 K	Nominal wattage Nominal voltage Nominal luminous flux Rated color temperature Light color (designation) 4.80 W 220240 V 600 lm 4000 K Cool White 4.80 W 220240 V 600 lm 2700 K Warm White 2.60 W 220240 V 320 lm 2700 K Warm White 2.60 W 220240 V 320 lm 2000 K Cool White	Nominal wattage Nominal voltage Nominal luminous flux Rated color temperature Light color (designation) Starting time 4.80 W 220240 V 600 lm 4000 K Cool White <0.5 s

	Lifespan				Additional product data	Capabilities	Certificates & standards
Product description	Nominal lamp life time	Rated lamp life time	Number of switching cycles	Lumen maintenance at end of service life	Base (standard designation)	Dimmable	Energy efficiency class
PARATHOM LED PIN 4.8 W/840 G9 ¹⁾	15000 h	15000 h	100000	0.70	G9	No	A++
PARATHOM LED PIN 4.8 W/827 G9 ¹⁾	15000 h	15000 h	100000	0.70	G9	No	A++
P PIN 30 2.6 W/827 G9 ¹⁾	15000 h	15000 h	100000	0.70	G9	No	A++
P PIN 2.6 W/840 G9 ¹⁾	15000 h	15000 h	100000	0.70	G9	No	A++
P PIN 3.8 W/840 G9 ¹⁾	15000 h	15000 h	100000	0.70	G9	No	A++

		Country specific cate	untry specific categorizations	
Product description	Energy consumption	Order reference	ILCOS	
PARATHOM LED PIN 4.8 W/840 G9 ¹⁾	5 kWh/1000h	LEDPPIN50 4,8W/		
PARATHOM LED PIN 4.8 W/827 G9 ¹⁾	5 kWh/1000h	LEDPPIN50 4,8W/		
P PIN 30 2.6 W/827 G9 ¹⁾	3 kWh/1000h	LEDPPIN30 CL 2,	DRT/C-2,6/827-220-	
			240-G9-15/52	
P PIN 2.6 W/840 G9 ¹⁾	3 kWh/1000h	LEDPPIN30 CL 2,	DRT/C-2,6/840-220-	
			240-G9-15/52	
P PIN 3.8 W/840 G9 ¹⁾	4 kWh/1000h	LEDPPIN40 CL 3,	DRT/C-3,8/840-220-	
			240-G9-20/58	

Product family datasheet

¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

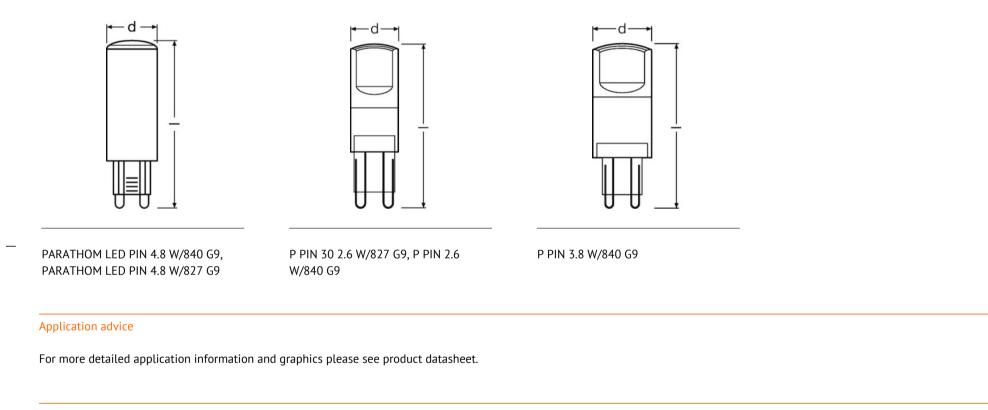

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075271890	PARATHOM LED PIN 4.8 W/840 G9	Shipping carton box 20	150 mm x 122 mm x 77 mm	1.41 dm³	376.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075271845	PARATHOM LED PIN 4.8 W/827 G9	Shipping carton box 20	150 mm x 122 mm x 77 mm	1.41 dm³	376.00 g
4058075811515	P PIN 30 2.6 W/827 G9	Shipping carton box 20	150 mm x 122 mm x 77 mm	1.41 dm³	246.00 g
4058075812697	P PIN 2.6 W/840 G9	Shipping carton box 20	150 mm x 122 mm x 77 mm	1.41 dm ³	256.00 g
4058075812710	P PIN 3.8 W/840 G9	Shipping carton box 20	150 mm x 122 mm x 77 mm	1.41 dm³	336.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For further products and actual information concerning LED lamps see

www.osram.com/ledlamps

For Guarantee see

www.osram.com/guarantee

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Product family datasheet

OSRAM is distribution partner of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH Marcel-Breuer-Strasse 6 80807 Munich, Germany