

Product family datasheet

PARATHOM Retrofit CLASSIC GLOBE

LED lamps, classic ball shape



- Domestic applications General illumination Outdoor use in outdoor luminaires only (minimum IP65) Perfect for decorative installations

- Very low energy consumption Instant 100 % light, no warm-up time Can be easily fitted instead of ordinary light bulbs Lamps with innovative LED "filament" technology
- Product features LED lamps for line voltage Not dimmable Mercury-free lamps Lifetime: up to 15,000 h Beam angle: up to 360° Energy efficiency class: A++Product benefits Very low energy consumption Instant 100 % light, no warm-up time Can be easily fitted instead of ordinary light bulbs Lamps with innovative LED "filament" technologyAreas of application Domestic applications General illumination Outdoor use in outdoor luminaires only (minimum IP65) Perfect for decorative installations



Product family datasheet

Technical data


Product description	Electrical data		Photometrical data			Light technical data	Dimensions & weight
	Nominal wattage	Nominal voltage	Nominal luminous flux	Rated color temperature	Light color (designation)	Starting time	Overall length
P RF CLAS GL 4.5 W/827 E27	4.50 W	220...240 V	470 lm	2700 K	Warm White	< 0.5 s	140.0 mm
P RF CLAS GL 7 W/827 E27	7.00 W	220...240 V	806 lm	2700 K	Warm White	< 0.5 s	140.0 mm
P RF CLAS GL 2.5 W/827 E27	2.50 W	220...240 V	250 lm	2700 K	Warm White	< 0.5 s	178.0 mm
P RF CLAS GL 4 W/827 E27	4.00 W	220...240 V	470 lm	2700 K	Warm White	< 0.5 s	168.0 mm
P RF CLAS GL 6.5 W/827 E27	6.50 W	220...240 V	806 lm	2700 K	Warm White	< 0.5 s	168.0 mm
P RF GLOBE 25 2 W/827 E27 FIL	2.50 W	220...240 V	250 lm	2700 K	Warm White	< 0.5 s	178.0 mm

Product description	Lifespan				Additional product data	Capabilities	Certificates & standards
	Nominal lamp life time	Rated lamp life time	Number of switching cycles	Lumen maintenance at end of service life	Base (standard designation)	Dimmable	Energy efficiency class
P RF CLAS GL 4.5 W/827 E27	15000 h	15000 h	100000	0.70	E27	No	A++
P RF CLAS GL 7 W/827 E27	15000 h	15000 h	100000	0.70	E27	No	A++
P RF CLAS GL 2.5 W/827 E27	15000 h	15000 h	100000	0.70	E27	No	A+
P RF CLAS GL 4 W/827 E27	15000 h	15000 h	100000	0.70	E27	No	A++
P RF CLAS GL 6.5 W/827 E27	15000 h	15000 h	100000	0.70	E27	No	A++
P RF GLOBE 25 2 W/827 E27 FIL	15000 h	15000 h	100000	0.70	E27	No	A+


Product description	Energy consumption	Country specific categorizations	
		Order reference	ILCOS
P RF CLAS GL 4.5 W/827 E27	5 kWh/1000h	LEDISON40P 4,5W	
P RF CLAS GL 7 W/827 E27	7 kWh/1000h	LEDISON60P 7W/8	
P RF CLAS GL 2.5 W/827 E27	3 kWh/1000h	LEDPG12525 2,5W	
P RF CLAS GL 4 W/827 E27	4 kWh/1000h	LEDPG12540 4W/8	
P RF CLAS GL 6.5 W/827 E27	7 kWh/1000h	LEDPG12560 6,5W	

Product family datasheet


Product description	Energy consumption	Country specific categorizations	
		Order reference	ILCOS
P RF GLOBE 25 2 W/827 E27 FIL	3 kWh/1000h	LEDPG12525 2,5W	DRAG/C-2/827-220/240-E27-124

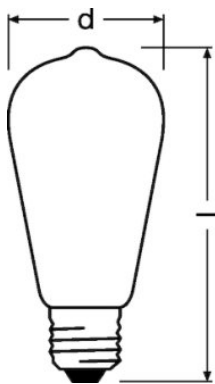

P RF CLAS GL 4.5 W/827 E27, P RF CLAS GL 7 W/827 E27

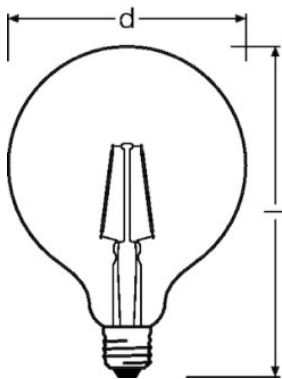

P RF CLAS GL 2.5 W/827 E27, P RF GLOBE 25 2 W/827 E27 FIL

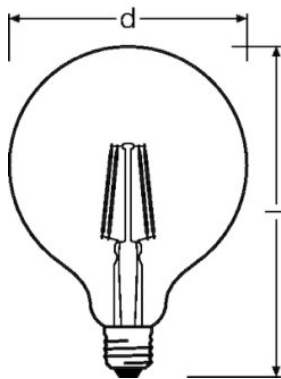

P RF CLAS GL 4 W/827 E27, P RF CLAS GL 6.5 W/827 E27

Application advice

For more detailed application information and graphics please see product datasheet.

Logistical Data

Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075287167	P RF CLAS GL 4.5 W/827 E27	Shipping carton box 10	337 mm x 141 mm x 161 mm	7.65 dm ³	738.00 g
4058075287181	P RF CLAS GL 7 W/827 E27	Shipping carton box 10	337 mm x 141 mm x 161 mm	7.65 dm ³	738.00 g
4058075288263	P RF CLAS GL 2.5 W/827 E27	Shipping carton box 10	710 mm x 290 mm x 193 mm	39.74 dm ³	1666.00 g
4058075288287	P RF CLAS GL 4 W/827 E27	Shipping carton box 10	710 mm x 290 mm x 216 mm	44.47 dm ³	2008.00 g
4058075288300	P RF CLAS GL 6.5 W/827 E27	Shipping carton box 10	710 mm x 290 mm x 216 mm	44.47 dm ³	2008.00 g
4052899962101	P RF GLOBE 25 2 W/827 E27 FIL	Shipping carton box 10	710 mm x 290 mm x 193 mm	39.74 dm ³	1616.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany