

Product family datasheet LED THREE STEP DIM CLASSIC A

LED lamps with three-step dimming



 Wherever dimming was originally not planned Residential interiors Hospitality Outdoor use in outdoor luminaires only (minimum IP65)

- Easy three-step dimming by repeatedly pressing the wall switch Easy and cost-effective operation, no dimmer required Low
 energy consumption Easy relamping thanks to compact design Instant 100 % light, no warm-up time Makes rooms multipurpose with adjustable light atmosphere
- Product features Dimmable in three steps: 100 %, 45 % and 15 % Controllable via standard wall switch Good quality of light; color rendering index Ra: ≥ 80 Mercury-free lampsProduct benefits Easy three-step dimming by repeatedly pressing the wall switch Easy and cost-effective operation, no dimmer required Low energy consumption Easy relamping thanks to compact design Instant 100 % light, no warm-up time Makes rooms multi-purpose with adjustable light atmosphereAreas of application Wherever dimming was originally not planned Residential interiors Hospitality Outdoor use in outdoor luminaires only (minimum IP65)




March 27, 2020, 23:59:26 LED THREE STEP DIM CLASSIC A

Technical data

	Electrical data		Photometrical data			Dimensions & weight	Lifespan
Product description	Nominal wattage	Nominal voltage	Rated color temperature	Light color (designation)	Nominal luminous flux	Overall length	Nominal lamp life time
SST CLAS A 6.5 W/827 E27	6.50 W	220240 V	2700 K	Warm White	806 lm	105.0 mm	15000 h
SST CLAS A 4 W/827 E14	4.00 W	220240 V	2700 K	Warm White	470 lm	97.0 mm	20000 h
SST CLAS A 4 W/827 E14	4.00 W	220240 V	2700 К	Warm White	470 lm	78.0 mm	15000 h

			Additional product data	Capabilities	Country specific categorizations
Product description	Rated lamp life time	Number of switching cycles	Base (standard designation)	Dimmable	Order reference
SST CLAS A 6.5 W/827 E27	15000 h	100000	E27	No	LSCLA603XD 6,5W
SST CLAS A 4 W/827 E14	20000 h	100000	E14	No	LEDSCLB403XD 4W
SST CLAS A 4 W/827 E14	15000 h	100000	E14	No	LEDSCLP403XD 4W

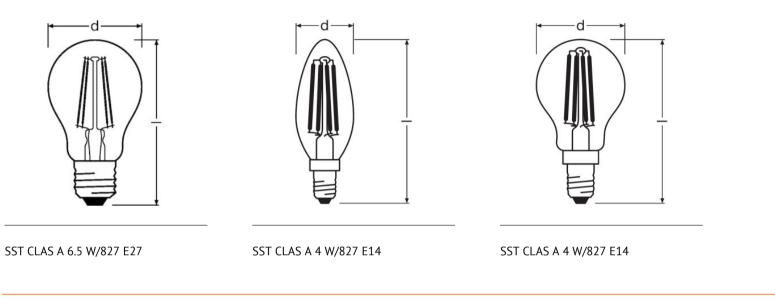

Application advice

For more detailed application information and graphics please see product datasheet.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075269743	SST CLAS A 6.5 W/827 E27	Shipping carton box 6	381 mm x 153 mm x 136 mm	7.93 dm³	468.00 g
4058075269767	SST CLAS A 4 W/827 E14	Shipping carton box 6	262 mm x 153 mm x 136 mm	5.45 dm ³	361.00 g
4058075269842	SST CLAS A 4 W/827 E14	Shipping carton box 6	285 mm x 153 mm x 136 mm	5.93 dm ³	340.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH Marcel-Breuer-Strasse 6 80807 Munich, Germany